



Protected Personnel Transport Vehicle (4x4)



Equipped with the Dongfeng Cummins turbocharged diesel engine ISDe28530, delivering powerful performance. Matched with a 6-speed manual transmission, it reaches a maximum speed of 110 km/h and can accommodate 23 occupants.


The entire vehicle provides 6-sided bulletproof protection:

- The surrounding body meets European Standard EN1522 Level B6;
- The floor and roof meet EN1552 Level B4;
- The windows use bulletproof glass equivalent to the body's bulletproof level, complying with EN1063 Level B6.

Key vehicle components are protected:

- Tires are equipped with run-flat inserts for explosion resistance;
- The fuel tank and battery are protected with B4-level bulletproofing.

Main Technical Parameters of the Vehicle

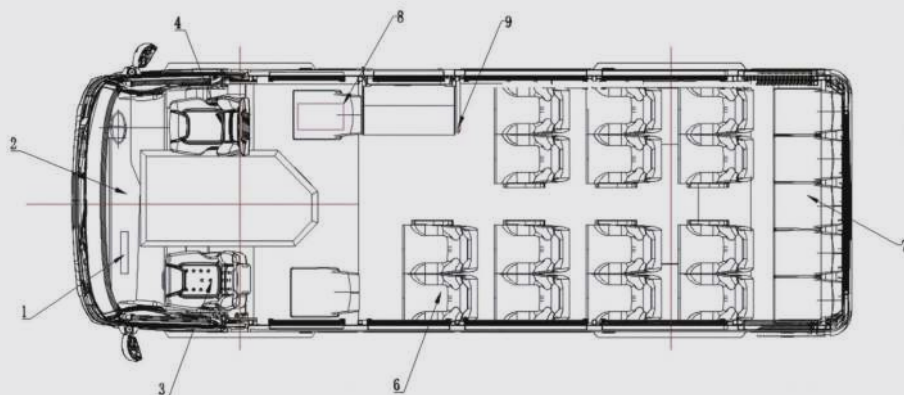

Interior Seat Layout

- 1. Instrument Panel Assembly
- 2. Steering Wheel
- 3. Co-Driver Seat
- 4. Driver Seat
- 5. Single-Row Seat
- 6. Double-Row Seat
- 7. Rear Bench Seat
- 8. Radiator
- 9. Boarding Handrail
- 10. Engine Bulge

Item	Parameter	Remarks
Overall Dimensions (mm)	6880×2400×3250	Including roof-mounted air conditioner
Wheelbase (mm)	3800	
Drive Type	4×4	
Driving Position	Right-Hand Drive	
Front/Rear Track Width (mm)	2010/2010	Single tire for front and rear
Front Overhang/Rear Overhang (mm)	1480/1600	
Curb Weight (kg)	≤11000	
Gross Vehicle Weight (GVW) (kg)	13000	
Maximum Payload Capacity (kg)	≥2000	Including occupants
Maximum Speed (km/h)	110	
Minimum Ground Clearance (mm)	300	
Maximum Wading Depth (mm)	700	
Approach Angle (°)	35	
Departure Angle (°)	18	
Breakover Angle (°)	17	
Static Rollover Angle (°)	35	
Number of Occupants	23	
Minimum Turning Diameter (m)	≥18.5	
Operating Temperature Range (°C)	-30~+46	
Storage Temperature Range (°C)	-35~+65	
Fuel Tank Capacity (L)	260	
Maximum Driving Range (km)	800	
Body Protection	EN1522 Level B6	Surrounding body: Level B6; Roof/Floor: Level B4 (no protection for roof air conditioner vents)
Bulletproof Glass	EN1063 Level B6	Multi-layer PC board